



# zmodo™

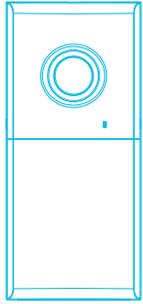

## Sight 180 Outdoor WiFi Camera Quick Start Guide


### 1 Getting to know your camera

The Sight 180 Outdoor features a full-HD 1080p ultra wide-angle outdoor camera that allows you to capture a view of your entire space, all at once.

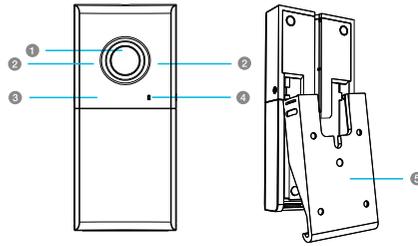

- 1 1080p HD Camera
- 2 Infrared (IR) LED
- 3 Status Light
- 4 Light Sensor
- 5 Mounting Bracket

### What's in the box:

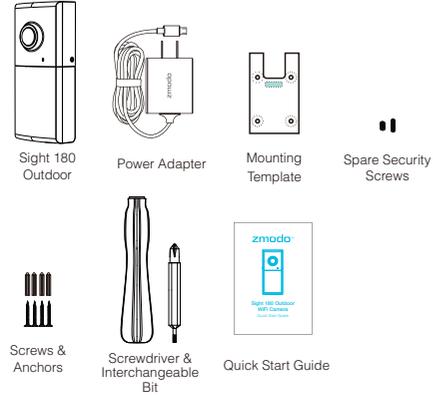

### 2 Mobile Setup

Please refer to the following instructions to configure your Sight 180 Outdoor. For detailed instructions and troubleshooting, please visit:

[www.zmodo.com/support](http://www.zmodo.com/support)

*Note: Please download and install App and connect camera to the App first before mounting camera on the wall.*

### Before you begin:

- You will need a strong **2.4GHz/5GHz WPA/WPA2 WiFi network** connection at the location of your Sight 180 Outdoor.
- Make sure you know the SSID (WiFi network name) and password of the **2.4GHz/5GHz WPA-PSK/WPA2-PSK WiFi Network** that you want your camera to connect to. Your network cannot be hidden.
- Make sure your network has at least 2mbps upload speed for each camera when live viewing or 4mbps upload speed for each camera when using the cloud service.
- Download and install the "Zmodo" app from Google Play™ or the App Store™ (*Compatibility: iOS® 9.0+ or Android™ 4.0+*). Launch the app and sign up for a free Zmodo account. All of your devices will be bound to this account.




- Power on your camera with the supplied power adapter.

We are constantly working to improve our product and app. Please visit [www.zmodo.com/support](http://www.zmodo.com/support) for updated instructions, manuals, and more.


1

2

3



1 Log in and press the Add Device option in the upper right corner of the Home Page.

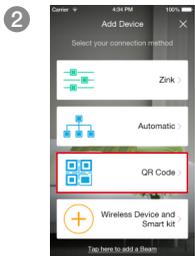


2 Select the "QR Code" connection method to connect your camera. Your camera will be added to your Zmodo account.

You can follow the in-app instructions or refer to steps 3-9 to complete setup.

4



3 Power on your camera. The status light will blink green when the camera has powered on. Tap "Next" to proceed.

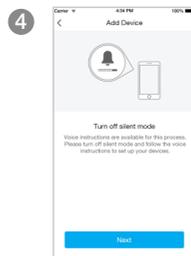


4 Turn up the volume on your phone for voice prompts during the mobile setup process. Tap "Next" to proceed.

5




5 Connect your phone to the 2.4GHz/5GHz WPA-PSK/WPA2-PSK WiFi network that you want your camera to connect to (network cannot be hidden). Tap "Next" to proceed.

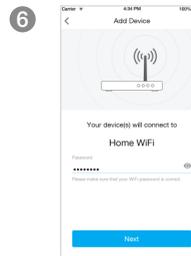


6 Enter the password of the WiFi network that you want your camera to connect to. Please make sure that your password is correct. Tap "Next" to proceed.

*Note: The WiFi password is case-sensitive.*

6

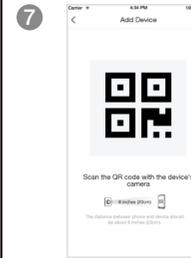

7 Steadily hold your phone's display in front of your Zmodo camera until you hear "Device connected". The distance between your phone and the camera should be about 8 inches.

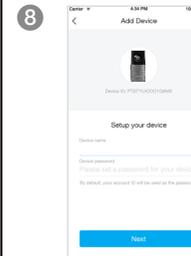

8 Name your camera and set a password for it. Tap "Next" to proceed.

*Note: The password provides an additional layer of security for your devices. You will not need to use this password when accessing your devices from the Zmodo app. It is not required, but highly recommended.*


7

9 Your camera has been successfully configured! Tap “Done” to finish. You can now share or view your camera.




### 3 Mounting your Sight 180 Outdoor

1 Remove the mounting bracket from the camera. Slide down to remove the mounting bracket from the camera as shown:




8

2 Mark and drill the appropriate holes in the wall for the mounting bracket. Place the mounting template against the wall where you would like to mount your camera, using the level as a guide. Mark the wall with the four corresponding holes for screws. Remove the paper, and drill four holes slightly smaller than the wall anchors.




3 Fasten the screws through the holes on the mounting bracket as shown below. Tap the wall anchors with a hammer until the anchors are flush against the wall. Fasten the screws through the holes on the bracket and into the anchors, as shown below.




9

4 Attach camera to the mounting bracket and fasten the screws. Slidethe camera onto the mounting bracket. The mounting bracket allows you to tilt the camera to adjust the viewing angle. Once you have the desired viewing angle, fasten the screws on the left and right sides of the camera.

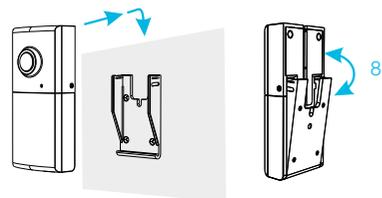

5 Power on your Sight 180 Outdoor using the supplied power adapter.

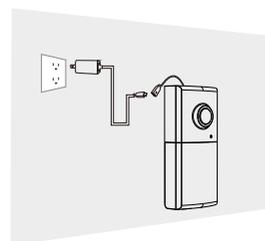

10

### 4 Main Features

The Sight 180 Outdoor allows you to monitor your home, day and night.

You can access your camera's full features by using the Zmodo app on your Android™ or iOS® smartphone.

You can also view your Sight 180 Outdoor using any web browser by logging into [user.zmodo.com](http://user.zmodo.com) with your Zmodo account information.

This section will cover the main features of your Sight 180 Outdoor.

#### 180° wide-angle view

A 180° ultra wide-angle view allows you to capture more of your space, all at once. Automatic fisheye correction means that you get a bigger, more detailed, and more accurate picture of your space.



11

#### Smart motion detection

Receive an alert instantly on your smartphone whenever motion is detected, keeping you in the loop at all times.



### 5 Recording and Viewing Options

#### Recording Options

This device is compatible with the cloud service. Please visit [www.zmodo.com/cloud](http://www.zmodo.com/cloud) for more information and articles. The cloud service will allow you to:

- Record continuously and store the footage onto secure cloud servers with bank-level encryption.
- Create and save video clips from your recordings.
- Access your footage and clips at any time from any location. We respect your privacy. Only you can access your footage through your user account.
- Enjoy more smart features in the future.

12

#### Viewing Options

All of your Zmodo devices will be bound to your Zmodo user account. You can access your camera and other devices by using the Zmodo app with any Android™ or iOS® device. Just download the Zmodo app from Google Play™ or the App Store™.

You can also access your devices from any web browser with our web app. Visit [user.zmodo.com](http://user.zmodo.com) and log in with your Zmodo user account information.

### 6 Status Light Definitions

- **Solid Green**  
Your device is powering on.
- **Blinking Green**  
Your device is ready for setup.
- **Blinking Blue**  
Your device is connecting to the WiFi network. Please do NOT turn off or unplug your device at this time.
- **Solid Blue**  
Your device has successfully connected to the WiFi network.

13

### 7 Troubleshooting

You can check the status light to determine if your camera has been connected to the WiFi or not.

If it is blinking green, it means that it has not been connected to the WiFi network and you may need to retry the setup method.

If it is solid blue, it means that it is connected to the WiFi network.

If you were unable to connect your camera successfully:

- Make sure that you are connecting to a **2.4GHz/5GHz WPA-PSK/WPA2-PSK WiFi network**, and that your network is not hidden.
- Please make sure that you entered the network name and password correctly. **Note:** Both are case-sensitive.
- Try increasing your phone's brightness when scanning the QR code during Mobile Setup.
- You may need to improve your WiFi strength. Try moving your router closer to your Sight 180 Outdoor, or purchasing a WiFi range extender.

14

### 8 Contact Us

#### Having difficulty?

We would love to help. You can use the Live Chat function in the Zmodo app if you have any technical problems. Just open the “Me” page in the lower right corner of the Home Page and select “Zmodo Support”.

For more instructions, troubleshooting, support, and other resources, please visit

[www.zmodo.com/support](http://www.zmodo.com/support)

#### Enjoying your Zmodo product?

Your feedback means a lot to us! Please share your positive experience on your favorite social media site to help spread the word.

Like us on Facebook.com/Zmodo

Follow us on Twitter @Zmodo

15